


Features

- **Noise Figure ≤ 2.0 dB**
- Unconditionally Stable at all temperatures
- Internally Regulated DC Voltage
- 50 Ohm Matched Input/Output
- Field Replaceable SMA connectors
- Excellent Group Delay and Phase Linearity
- 0.009 inches diameter RF In/Out feed through
- 3 Year Warranty




Specifications (23 °C)

Parameter	Min	Typ	Max	
Frequency Range	0.1	-	18	GHz
Noise Figure *			2.0	dB
Gain	32	34	-	dB
Gain Flatness	-	± 1.3	± 1.5	dB
P1dB Output Power	8	10	-	dBm
Input VSWR	-	2.0:1	2.3:1	
Output VSWR	-	1.8:1	2.0:1	
Operating Temperature	-55	-	+85	°C
Third Order Intercept	18	20		dBm
Second Order Intercept	28	30		dBm
Group Delay		± 15	± 25	psec
Voltage	+12	-	+15	V
Current	-	150	195	mA


Options

- **Optimized Performance over Selected Bandwidth**
- Internally DC Block Input (Output DC Block Standard)
- Hermetically Sealed Package
- Improved Gain Flatness ± 1.0 dB Max
- Gain and Phase matching
- Improved IN & OUT VSWR
- High Power Input Protection
- Lower Noise Figure (**Cryogenic Temp**)




* Noise Sources used for measurement: 0.1- 18 GHz: HP346A, N.F. Uncertainty (approx. 0.15 dB). 0.1 dB due to ENR of HP 346A, and 0.05 dB, due to gain modulation of the unit, caused by the HP 346A source impedance change in the ON and OFF state.
Noise Figures and other parameters degrade below 500 MHz.
Noise Figures at Cryogenic Temp, not given due to uncertainty of measurement for very low values. Call to discuss.


Performance Graphs

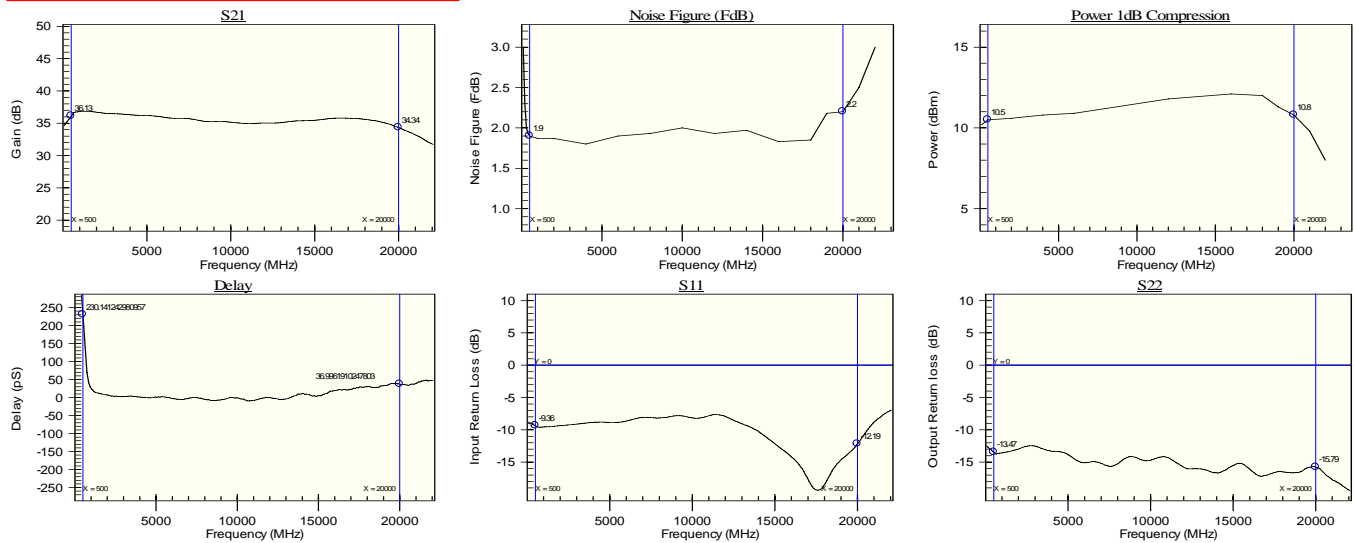

Outline Drawing

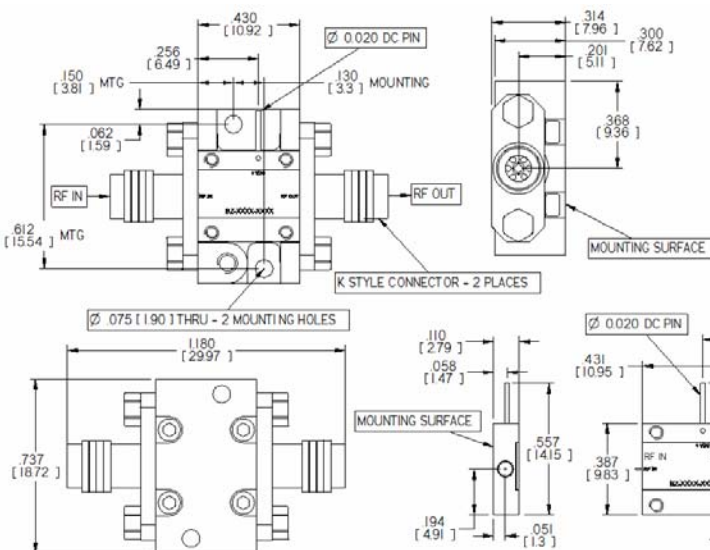

Mounting Drawing

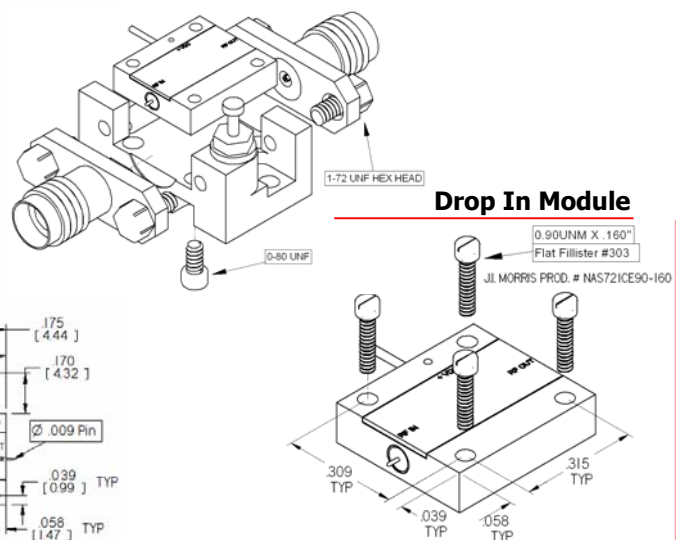

00194